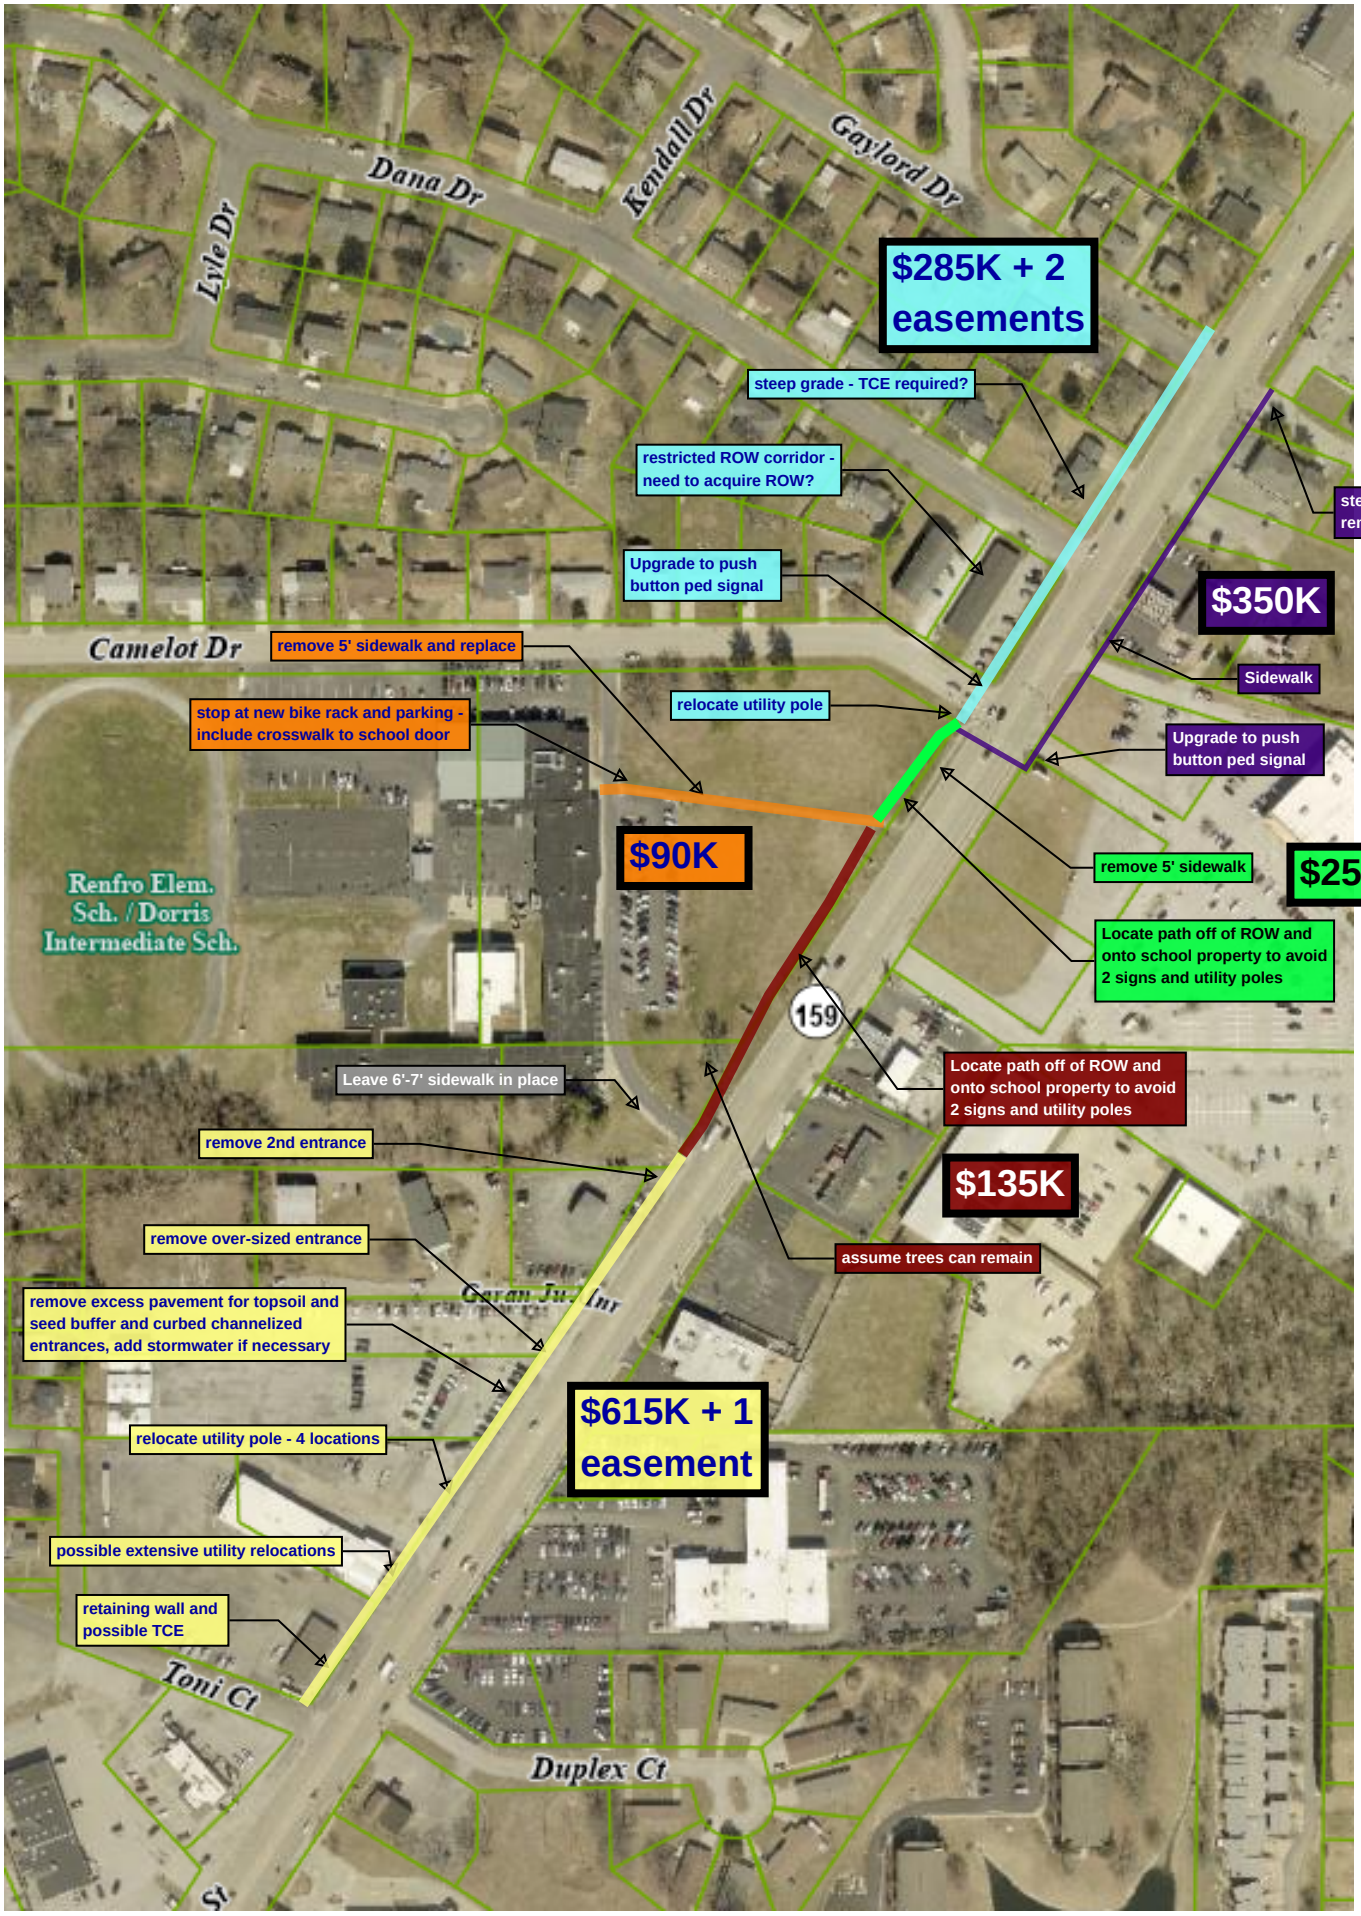
Dana Dr
Kendall Dr
Gaylord Dr
Lyle Dr
Camelot Dr
Renfro Elem. Sch. / Dorris Intermediate Sch.
159
Toni Ct
Duplex Ct
$285K + 2 easements
steep grade - TCE required?
restricted ROW corridor - need to acquire ROW?
Upgrade to push button ped signal
steep grade - road removal for regrading
$350K
Sidewalk
remove 5' sidewalk and replace
relocate utility pole
stop at new bike rack and parking - include crosswalk to school door
Upgrade to push button ped signal
$90K
remove 5' sidewalk
$25K
Locate path off of ROW and onto school property to avoid 2 signs and utility poles
Leave 6'-7' sidewalk in place
Locate path off of ROW and onto school property to avoid 2 signs and utility poles
remove 2nd entrance
$135K
remove over-sized entrance
assume trees can remain
remove excess pavement for topsoil and seed buffer and curbed channelized entrances, add stormwater if necessary
$615K + 1 easement
relocate utility pole - 4 locations
possible extensive utility relocations
retaining wall and possible TCE